

Single Phase Undervoltage Monitor

HLV Series

30 A SPDT Relay Output



US Patent 6708135


- Protects against undervoltage in Single Phase Systems
- 30 A SPDT N.O. Output Contacts
- 100 ... 240 VAC Input Voltage
- 70 ... 220 VAC Adjustable Undervoltage Trip Point in 2 Ranges
- Restart Delays from 3 ... 300 s
- Trip Delay 1 ... 20 s Fixed
- Isolated or Non Isolated Relay Contacts

Approvals:

Description


The HLV Series is a single phase undervoltage monitor designed to protect sensitive equipment from brownout or undervoltage conditions. Time delays are included to prevent nuisance tripping and short cycling. The 30 A, 1 hp rated SPDT relay contacts allow direct control of motors, solenoids and valves. The output relay can be ordered with isolated SPDT contact to allow monitoring of one voltage and switching a separate voltage. Two undervoltage trip point ranges allow monitoring of 110 to 120 VAC or 208 to 240 VAC systems.

Connection



N = Relay contacts are non-isolated.
 NO = Normally Open
 NC = Normally Closed
 C = Common
 T1 = Undervoltage Trip Point
 T2 = Restart Delay


Dashed lines are internal connections.



I = Relay contacts are isolated.

Dashed lines are internal connections.

Function

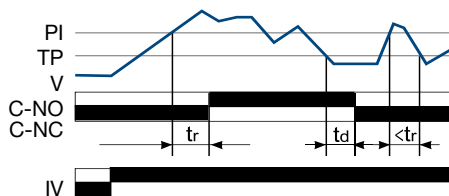


tr = Restart Delay
 td = Trip Delay
 PI = Pull-in 105% or trip point
 TP = Trip Point
 V = Monitored Voltage
 IV = Input voltage
 C-NO = Normally Open Contacts
 C-NC = Normally Closed Contacts

Operation

Upon application of input voltage the output relay remains de-energized. When the input voltage value is above the pull-in voltage, the restart delay begins. At the end of the restart delay, the output relay energizes. When the input voltage falls below the trip point, the trip delay begins. If the input voltage remains below the pull-in voltage for the entire trip delay the relay de-energizes. If the input voltage returns to a value above the pull-in voltage, during the trip delay, the trip delay is reset and the relay remains energized. If the input voltage falls below the trip point voltage during the restart delay, the delay is reset and the relay remains de-energized. Reset is automatic upon correction of an undervoltage fault.

Reset: Removing input voltage resets the output relay and the time delays.

Accessories




Quick connect to screw adaptor
 P/N: **P1015-18**



Female quick connect P/Ns:
P1015-64 (AWG 14/16)
P1015-13 (AWG 10/12)



Mounting bracket
 P/N: **P1023-6**



DIN rail P/Ns:
C103PM (Al)

DIN rail adaptor
 P/N: **P1023-20**

See accessory pages for specifications.

Available Models-

HLVA4I25

HLVA6I23

HLVA6N21

Don't see what you need? Call us for a minimum quantity and price quote!

HLV
Series

A

X

Undervoltage Range
 - **4** - 70 ... 120 VAC
 - **6** - 170 ... 220 VAC

X

Output Connection
 - **I** = Isolated SPDT
 - **N** = Non-Isolated SPDT

X

Restart Delay
 - **2** - Onboard Adjustment
 3...300 s

X

Trip Delay
 - Fixed 1 ... 20 s in
 1 s increments

Example P/N's: **HLVA4N25** = 70 ... 120 VAC Trip Point Range, Non-Isolated SPDT, Adjustable Restart Delay, Trip Delay fixed at 5 seconds
HLVA6I220 = 170 ... 220 V Trip Point Range, Isolated SPDT, Adjustable Restart Delay, Trip Delay fixed at 20 seconds

Single Phase Undervoltage Monitor

HLV Series

30 A SPDT Relay Output


Voltage
Monitors

Technical Data

Input			
Min and Max RMS Voltage		70 ... 264 VAC	
Line Frequency		50 ... 60 Hz	
Power Consumption		AC ≤ 4 VA	
Undervoltage Sensing			
Type		Peak Voltage Sensing	
Ranges	(4)	70 ... 120 VAC	
	(6)	170 ... 220 VAC	
Pull-In Voltage		105% or Trip Point Voltage	
Trip Point Accuracy		± 3% of Trip Point	
Time Delay			
Restart Delays		3 ... 300 s adjustable	
Trip Delay		1 ... 20 s fixed in 1 s increments	
Repeat Accuracy		+/-0.5% or 20 ms, whichever is greater	
Tolerance (Factory Calibration)		+/-5%	
Reset Time		≤ 150 ms	
Time Delay vs. Temp. & Voltage		≤ +/-10%	
Output			
Type/Form		Electromechanical relay/SPDT	
Ratings:		SPDT-N.O	SPDT-N.C.
General Purpose	125/240 V AC	30 A	15 A
Resistive	125/240 V AC	30 A	15 A
	28 V DC	20 A	10 A
Motor Load	125 V AC	1 hp*	1/4 hp**
	240 V AC	2 hp**	1 hp**
Life		Mechanical -- 1 x 10 ⁶ Electrical -- 1 x 10 ⁵ , *3 x 10 ⁴ , **6,000	
Protection			
Surge		IEEE C62.41-1991 Level A	
Circuitry		Encapsulated	
Isolation Voltage		≥ 1500 V RMS input to output; isolated units	
Insulation Resistance		≥ 100 MΩ	
Mechanical			
Mounting		Surface mt. with one #10 (M5 x 0.8) screw	
Package		3 x 2 x 1.5 in. (76.7 x 51.3 x 38.1 mm)	
Termination		0.25 in. (6.35 mm) male quick connects	
Environmental			
Operating Temp.		-40°C ... +60°C	
Storage Temp.		-40°C ... +85°C	
Humidity		95% relative, non-condensing	
Weight		≅ 3.9 oz (111 g)	

7

Mechanical View

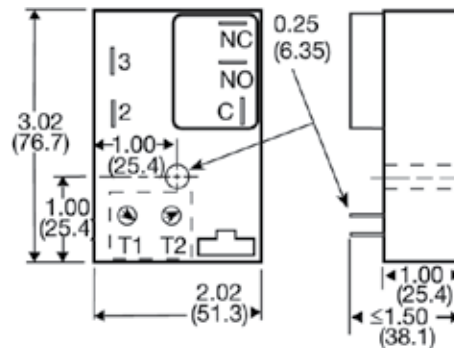

T1 = Undervoltage Trip Point
T2 = Restary Delay

Inches (Millimeters)

HLV02B01 09.10