


Delay On Make KSD1 Digi-Timer Timing Module




5

- Fixed or Adjustable Delays from 0.1 s ... 1000 min in 6 Ranges
- +/-0.5% Repeat Accuracy
- +/-5% Factory Calibration
- 12 ... 230 V in 5 Ranges
- 1 A Solid State Output
- Encapsulated

Approvals:

Accessories




External adjust potentiometer
P/Ns:
P1004-95 (fig A)
P1004-95-X (fig B)



Mounting bracket
P/N: P1023-6




Female quick connect
P/Ns:
P1015-64 (AWG 14/16)
P1015-14 (AWG18/22)



Quick connect to screw adaptor
P/N: P1015-18



Versa-knob
P/N: P0700-7



DIN rail adaptor
P/N: P1023-20

See accessory pages for specifications.

Description


The KSD1 Series features two-terminal, series-connection with the load. The KSD1 Series is an ideal choice for delay on make timing applications. This series is designed for general purpose commercial and industrial applications where a small, cost effective, reliable solid state timer is required. The factory calibration for fixed time delays is within 5% of the target time delay. The repeat accuracy, under stable conditions, is 0.5% of the selected time delay. This series is designed for popular AC and DC voltages. Time delays of 0.1 seconds to 1000 minutes are available in 6 ranges. The output is rated 1 A steady and 10 A inrush. The modules are totally solid state and encapsulated to protect the electronic circuitry.

Operation

Upon application of input voltage, the time delay begins. The output is de-energized before and during the time delay. At the end of the time delay, the output energizes and remains energized until input voltage is removed.


Reset: Removing input voltage resets the time delay and output.

Function

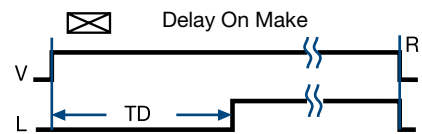

V = Voltage L = Load R = Reset
TD = Time Delay — = Undefined time

Connection

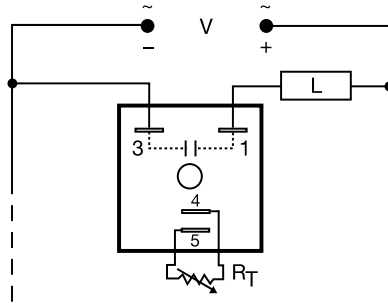

R_T is used when external adjustment is ordered.
Load may be connected to terminal 3 or 1.
Dashed lines are internal connections.

Available Models-

KSD1111S	KSD11120S	KSD1120
KSD1123	KSD1131	KSD1133
KSD1230	KSD1320	KSD14110M
KSD14110S	KSD14115S	KSD1412S
KSD14130S	KSD1414S	KSD1415S
KSD1420	KSD1430	KSD1431
KSD1433	KSD1434	KSD16130S

Don't see what you need? Call us for a minimum quantity and price quote!

Ordering Table

KSD1 Series	X Input Voltage	X Adjustment	X Time Delay*
	-1 - 12 V DC	-1 - Fixed	-0 - 0.1 ... 10 s
	-2 - 24 V AC	-2 - External Adjust	-1 - 1 ... 100 s
	-3 - 24 V DC		-2 - 10 ... 1000 s
	-4 - 120 V AC	-3 - Onboard Adjust	-3 - 0.1 ... 10 m
	-6 - 230 V AC		-4 - 1 ... 100 m
			-5 - 10 ... 1000 m

*If Fixed Delay is selected, insert delay [0.1 ... 1000] followed by (S) secs. or (M) mins.

Example P/N: **KSD1421** Fixed - **KSD1410.5S**

Delay On Make KSD1 Digi-Timer Timing Module


Dedicated
timers

Technical Data

Time Delay	
Range	0.1 s ... 1000 m in 6 adjustable ranges or fixed
Repeat Accuracy	+/-0.5% or 20 ms, whichever is greater
Tolerance (Factory Calibration)	≤ +/-5%
Recycle Time	≤ 150 ms
Time Delay vs. Temperature & Voltage	≤ +/-10%
Input	
Voltage	24, 120, or 230 V AC; 12 or 24 V DC
Tolerance	+/-20%
Line Frequency	50 ... 60 Hz
Output	
Type	Solid state
Form	Normally Open, open during timing
Maximum Load Current	1 A steady state, 10 A inrush at 60°C
Minimum Holding Current	≤ 40 mA
OFF State Leakage Current	≅ 7 mA at 230 V AC
Voltage Drop	≅ 2.5 V at 1 A
Protection	
Circuitry	Encapsulated
Dielectric Breakdown	≥ 2000 V RMS terminals to mounting surface
Insulation Resistance	≥ 100 MΩ
Polarity	DC units are reverse polarity protected
Mechanical	
Mounting	Surface mount with one #10 (M5 x 0.8) screw
Package	2 x 2 x 1.21 in. (50.8 x 50.8 x 30.7 mm)
Termination	0.25 in. (6.35 mm) male quick connect terminals Environ-
mental	
Operating Temperature	-40°C ... +60°C
Storage Temperature	-40°C ... +85°C
Humidity	95% relative, non-condensing
Weight	≅ 2.4 oz (68 g)

External Resistance vs Time Delay

In Secs. or Mins.

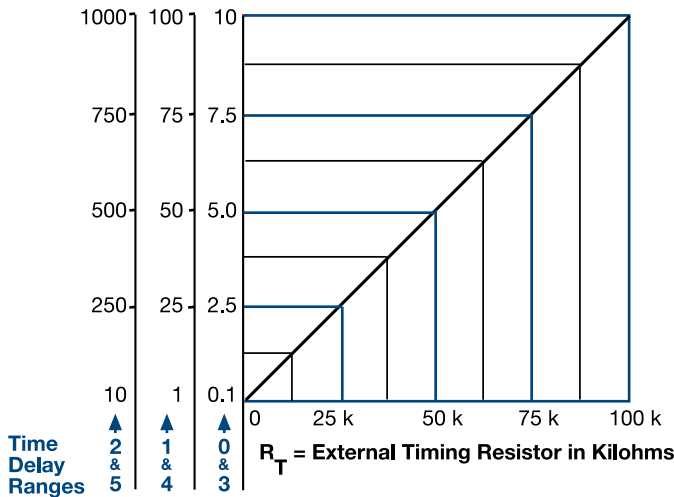

This chart applies to externally adjustable part numbers.


The time delay is adjustable over the time delay range selected by varying the resistance across the R_T terminals; as the resistance increases the time delay increases.

When selecting an external R_T , add the tolerances of the timer and the R_T for the full time range adjustment.


Examples: 1 to 50 S adjustable time delay, select time delay range 1 and a 50 K ohm R_T . For 1 to 100 S use a 100 K ohm R_T .

Mechanical View

Fixed & External Adjust

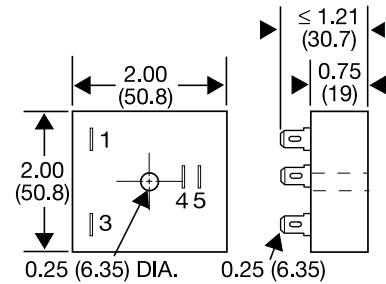

Onboard Adjust

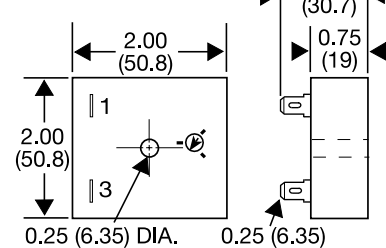

Inches (Millimeters)